#### **PCT**

### WORLD INTELLECTUAL PROPERTY ORGANIZATION



# INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 5:		(11) International Publication Number:	WO 92/01818
C21C 7/10	A1	(43) International Publication Date:	6 February 1992 (06.02.92)

(21) International Application Number:

PCT/US91/03951

(22) International Filing Date:

5 June 1991 (05.06.91)

(30) Priority data:

555,913

19 July 1990 (19.07.90) US

(71) Applicant: AXEL JOHNSON METALS, INC. [US/US]; 215 Welsh Pool Road, Lionville, PA 19353 (US).

(72) Inventor: HARKER, Howard, R.; 510 Conestoga Road, Malvern, PA 19355 (US).

(74) Agent: HONE, Francis, J.; Brumbaugh, Graves, Donohue & Raymond, 30 Rockefeller Plaza, New York, NY 10112 (US).


(81) Designated States: AT (European patent), AU, BE (European patent), CH (European patent), DE (European patent), DK (European patent), ES (European patent), FR (European patent), GB (European patent), GR (European patent), IT (European patent), JP, LU (European patent), NL (European patent), SE (European patent).

#### Published

With international search report.

Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: VACUUM PROCESSING OF REACTIVE METAL

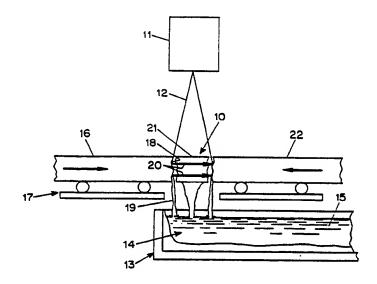

#### (57) Abstract

In the particular embodiments described in the specification, a vacuum furnace includes a conveying arrangement for holding four solid metal members (16, 22) with their end faces (18) in closely-spaced relation and an energy beam gun (11) directs energy (12) to the adjacent faces to melt the metal. Metal (20) ejected from the heated surfaces by explosive vaporization of inclusions in the metal is trapped by the adjacent surfaces of the other metal members.

#### FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	ES	Spain	MG	Madagascar
ΑU	Australia	FI	Finland	ML	Mali
BB	Barbados	FR	France	MN.	Mongolia
BE	Belgium	GA	Gabon	MR	Mauritania
BF	Burkina Faso	GB	United Kingdom	MW	Malawi
BG	Bulgaria	GN	Guinca	NL	Netherlands
BJ	Benin	GR	Greece	NO	Norway
BR	Brazil	HU	Hungary	~ PL	Poland
CA	Canada	IT	Italy	RO	Romania
CF	Central African Republic	JP	Japan	SD	Sudan
CG	Congo	KP	Democratic People's Republic	SE	Sweden
CH	Switzerland		of Korea	SN	Senegal
CI	Côte d'Ivoire	KR	Republic of Korea	su+	Soviet Union
CM	Cameroon	LI	Liechtenstein	TD	Chad
CS	Czechoslovakia	LK	Sri Lanka	TG	Togo
DE	Germany	LU	Luxembourg	US	United States of America
DK	Denmark	MC	Monaco		

<sup>+</sup> It is not yet known for which States of the former Soviet Union any designation of the Soviet Union has effect.

#### Description

## Vacuum Processing of Reactive Metal

#### Technical Field

This invention relates to improvements in vacuum processing of reactive metal, such as in an electron beam or plasma furnace, and to an improved furnace for use in such processing.

#### Background Art

Certain reactive metals such as titanium, for 10 example, are prepared by reduction of chlorides of the metals using sodium or magnesium to produce sponge Such sponge metals, however, contain trapped sodium or magnesium chloride and, when heated in a vacuum such as in an electron beam or plasma furnace, 15 the trapped chlorides vaporize in an explosive manner, spraying unmelted sponge particles throughout the interior of the furnace so as to reduce the yield and also contaminate material which has been refined in the furnace with unrefined particles. Similarly, scrap material resulting from the machining or other 20 forming of such metals which has been compacted into a solid piece for processing may contain vaporizable impurities which produce the same effect.

One way of avoiding this problem is to use an inert gas plasma burner which operates at higher pressures, as described in the Ulrich Patent No. 3,771,585, but this does not provide the advantages of an electron beam or plasma furnace operated at high vacuum. The Hanks Patent No. 3,101,515 discloses an electron beam furnace with magnetically guided beams in order to avoid contamination of the electron beam source by sponge particles explosively ejected from the raw material, but that arrangement does not avoid the problem of lost material and contamination of the

refined material. The Herres Patent No. 2,734,244 discloses a vacuum arc refining furnace for titanium sponge which requires a separate chamber to vaporize and drive off volatile inclusions from the sponge material which might interfere with the refining process, after which the material is delivered to the refining furnace.

#### Disclosure of Invention

WO 92/01818

15

35

Accordingly, it is an object of the present invention to provide a new and improved process for
vacuum refining metal materials which overcomes the
above-mentioned disadvantages of the prior art.

Another object of the invention is to provide a vacuum furnace for processing reactive metals in an improved manner.

These and other objects of the invention are attained by supplying a metal member to be processed in a vacuum furnace by application of energy to an exposed surface of the metal member and providing one 20 or more closely-spaced spray-intercepting surfaces to block unmelted material sprayed from the heated surface of the metal member from reaching other parts of the vacuum furnace. In one embodiment, one or more of the blocking surfaces is provided by one or more addi-25 tional metal members to be processed. In this arrangement, the additional metal members have closely adjacent surfaces which are also heated by the application of energy and, preferably, an array of three or more metal members have adjacent surfaces substantially enclosing the region in which the metal is heated by the energy application.

In a typical vacuum furnace arranged for processing metal according to the invention, four metal members are supported with their end surfaces disposed in closely-spaced opposed relation and an energy source positioned above the region surrounded by the opposed surfaces supplies energy to all of the adja-

cent metal surfaces to melt the metal simultaneously and cause the molten metal to flow into a receptacle such as a trough or hearth beneath the region surrounded by the surfaces. Thus, substantially all of the solid metal particles sprayed from the heated surfaces by vaporized inclusions as the metal surfaces are heated is merely deposited on an adjacent metal surface for melting or else drops into the receptacle for molten material flowing from those surfaces.

Further objects and advantages of the invention will be apparent from a reading of the following description in conjunction with the accompanying drawings in which:

# Brief Description of Drawings

Fig. 1 is a schematic side view of the melting region of a representative embodiment of a vacuum furnace arranged in accordance with the invention; and Fig. 2 is a schematic plan view of the region of the furnace shown in Fig. 1.

# 20 Best Mode for Carrying Out the Invention

In the representative embodiment of the invention shown in the drawings, the melting region 10 of a vacuum furnace, which may, for example, be an electron beam or plasma furnace having an evacuated enclosure (not shown) includes an electron beam or plasma gun 11 arranged in the usual manner to direct a beam of energy 12 in a controlled pattern to heat the metallic raw material to be melted and processed in the furnace. A hearth 13 arranged to receive the metallic material to be processed has a receiving portion 14 irradiated by the gun 11 for receiving molten metal to form a pool 15 which flows from the receiving portion toward a refining portion, not shown in the drawing, where the molten metal is refined and subsequently poured into a casting mold.

Solid metal such as titanium sponge which contains included vaporizable substances such as sodium or magnesium chloride as a result of the sponge formation process or compacted scrap metal containing va-5 porizable impurities is supplied to the furnace in the form of a solid member such as an electrode 16 and is fed toward the melting region 10 by a conveyor arrangement 17. Impingement of energy from the gun 11 on the front surface 18 of the electrode 16 melts the material at the surface, producing a molten stream 19 which flows from the front surface into the hearth 13. Because the electrode contains vaporizable inclusions, heating of the surface 18 causes the vaporizable material to be vaporized rapidly and to eject solid or partially melted metal away from the surface 18 as indicated by the arrows 20.

In accordance with the invention, the front surface 18 of the electrode 16 is substantially surrounded by closely adjacent surfaces which receive and trap the material ejected from the surface 18. 20 illustrated embodiment, three additional metal electrodes 21, 22 and 23 are arranged as best seen in Fig. 2 to form an enclosed region adjacent to the surface 18 with the electrode 22 directly opposed to 25 the electrode 16 and the electrodes 21 and 23 opposed to each other and at right angles to the electrodes 16 and 22. As indicated by the arrows, each of the electrodes is movable toward the melting region 10 as the end surfaces of the electrodes are melted. ably, the four electrodes are oriented at 45° to the 30 longitudinal axis of the hearth 13, as shown in Fig. 2, to assure adequate access to the surface of the pool of molten metal 15 from another gun in the refining area (not shown).

In the illustrated embodiment, each of the additional electrodes 21, 22, and 23 is guided on a corresponding conveyor toward the region adjacent to the electrode 16 so that all four electrodes are continu-

ously melted to supply material to the hearth 13 and substantially all of the solid material ejected by explosive vaporization from each of the adjacent surfaces impinges upon the surface of one of the other electrodes, where it is melted by the energy beam and flows into the hearth with the other molten material. Any material which is not melted on an adjacent electrode face or which falls directly into the pool 15 of molten material is melted by the energy beam 12 as it passes between the adjacent electrode surfaces and applies energy to the surface of the molten metal in the pool 15.

If desired, instead of having four electrodes 16, 21, 22 and 23, all movable on conveyors toward the melting region 10, the furnace may be arranged so that only one or two of the electrodes are fed toward the melting zone and the other adjacent surfaces are maintained stationary and only that material which accumulates on those surfaces is melted by the electron beam 20. 12. With this arrangement, it is not necessary for the additional electrodes to have substantial length and the furnace structure is significantly simplified. While only four electrodes, all disposed in the same horizontal plane, are shown in the illustrated embodiment, it is also possible to provide more or fewer electrodes in a horizontal plane and to include further electrodes extending at an angle to a horizontal plane as long as the energy beam 12 has access to the adjacent surfaces of all of the electrodes to be melted and provision is made for molten material to flow from the electrodes into the hearth.


Although the invention has been described herein with reference to specific embodiments, many modifications and variations therein will readily occur to those skilled in the art. Accordingly, all such variations and modifications are included within the intended scope of the invention.

35

#### Claims

- 1. A method for vacuum processing of metal containing vaporizable impurities comprising supplying metal to a vacuum furnace in the form of a member having a surface to be melted by energy impingement, providing at least one further surface closely adjacent to the surface to be melted to receive metal particles ejected from the surface to be melted upon heating thereof by energy impingement, and directing an energy beam toward the surface of the member to be melted in a melting region to melt material at the surface.
- A method according to Claim 1 wherein the adjacent surface is the surface of another metal
   member to be melted.
  - 3. A method according to Claim 1 including providing a plurality of surfaces closely adjacent to the end surface of the solid member to receive metal ejected therefrom.
- 20 4. A method according to Claim 1 including moving the solid member toward the melting region as the surface thereof is melted by the energy beam.
- 5. A method according to Claim 1 wherein the adjacent surface is the end surface of a second metal member to be melted and including moving the second metal member toward the melting region as the end surface thereof is melted by the energy beam.
- 6. A method according to Claim 1 including providing three further metal members having surfaces closely adjacent to the surface of the metal member to be melted.

- 7. A method according to Claim 6 including moving each of the further metal members toward the melting region as the surfaces thereof are melted.
- 5 8. A vacuum furnace for processing metal comprising energy gun means disposed to direct a beam of energy toward a melting region, conveyor means for guiding a metal member having an end surface toward the melting region to expose the end surface thereof to an energy beam from the energy 10 gun, and confining means adjacent to the melting region providing at least one confining surface closely adjacent to the end surface of a metal member conveyed by the conveyor means toward the melting region to receive metal ejected from the 15 end surface of the metal member upon heating thereof.
- A vacuum furnace according to Claim 8 wherein the confining means comprises a plurality of metal members having surfaces disposed adjacent to the surface of the metal member being melted.
  - 10. A vacuum furnace according to Claim 9 including conveying means for conveying each of the plurality of metal members toward the melting region.

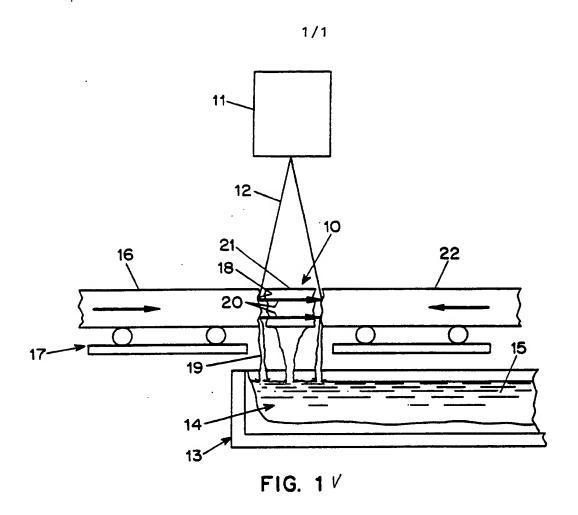

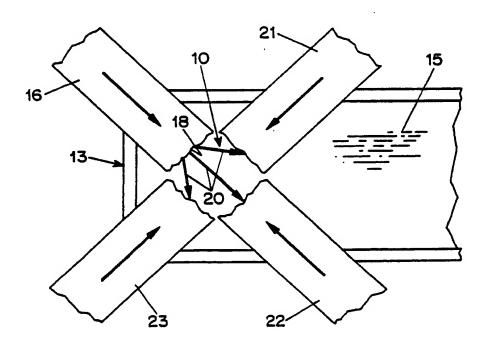


FIG. 2

## INTERNATIONAL SEARCH REPORT

International Application No. PCT/US91/03951

I. CLAS	SIFICATIO	N OF SUBJECT MATTER (if several class	ification symbols apply, indicate all) *							
According to International Patent Classification (IPC) or to both National Classification and IPC IPC(5) C21C 7/10										
U.S. 75/10.64										
II. FIELDS SEARCHED										
		<del></del>	ntation Searched 7							
Classificati	ón System		Classification Sympols	<del></del>						
U.S. C	l.	75/10.19, 10.64, 508 266/207, 208	•							
	Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched *									
	,	ONSIDERED TO BE RELEVANT * on of Document, 11 with indication, where app	propriate of the relevant speciage 12	Relevant to Claim No. 13						
Category *	C.tati	on an accument, with indication, where app	Numicie. Of the relevant passages is	nelevant to CIZIM No. 13						
A	US, A, (See e	3,342,250 (TREPPSCHUH)	, 19 September 1967	1-10						
		•	·							
	-									
	_	of cited documents: 10	"T" later document published after t or priority date and not in confi	ct with the application but						
con	sidered to be	of particular relevance	cited to understand the principl							
filin "L" doc white	g date ument which ch is cited to	t but published on or after the international may throw doubte on priority claim(s) or satablish the publication date of another	"X" document of particular releven cannot be considered novel or involve an inventive step "Y" document of particular releven	cannot be considered to						
"O" doc: othe	ument referr er means	special reason (as specified) ing to an oral disclosure, use, exhibition or had prior to the interpetional filing data but	cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.							
, ,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,		hed prior to the international filing date but lority date claimed	"&" document member of the same	petent family						
IV. CERT	IFICATION									
	_	npletion of the International Search	Date of Mailing of this International Se	earch Report						
19 November 1991 International Searching Authority  Supervise of Authorized Officer										
IS.	A/US		Peter D. Rosenberg	CAREO XI						